AXON®

DL
DECORATIVE LABELING

# THERMORAY® RADIANT HEAT SHRINK TUNNELS



*SHOWN WITH OPTIONAL FLOOR STAND*

## Economical, compact, and easy-to-operate radiant heat shrink tunnels

ThermoRay® radiant heat shrink sleeve tunnels are the economical shrink models in Axon's complete line of shrink sleeve tunnels.

ThermoRay radiant heat tunnels offer superior, uniform shrink performance by using infrared heating elements with integrated fans for even head distribution. They are ideal for low shrink % applications and tamper evident bands.

ThermoRay tunnels can accommodate a range of low-shrink applications and dual tunnel configurations are offered for higher speed applications or applications requiring longer shrink times.

### FEATURES AND BENEFITS

- **Size range fl exibility** - Container diameters up to 3.5" and heights up to 5.5"
- **Tool-less container changeovers** - Process is quick, simple, intuitive and repeatable
- **Stainless steel construction** - Durable, easy to clean, easy to maintain
- **Cantilevered floor stand mounting** -Tunnels can be installed over existing or new conveyor
- **Digital temperature controller** - Provides accurate controls of tunnel temperature

### SHRINK APPLICATIONS

Like every Axon shrink tunnel, ThermoRay offers the flexibility to perform multiple shrink applications. This flexibility makes Axon shrink sleeve applicators one of the best values in the industry.



FULL BODY



FULL BODY OVER THE CAP



TAMPER EVIDENT



PARTIAL

# AXON // THERMORAY® RADIANT HEAT SHRINK TUNNELS


## TYPICAL PRODUCT SPECIFICATIONS

| | |
|---|---|
| **ThermoRay Max. Container Dimensions** | Diameters up to 3.5" and heights up to 5.5" |
| **Tunnel Opening** | 4″ wide x 6.25″ high (102 mm x 158 mm) |
| **Heat Source** | 2 x 2.5kW infrared heaters |
| **Length** | 30″ (762 mm) |


| | |
|---|---|
| **Power** | 220 VAC, 1-phase 24 AMPS |
| **Construction** | Stainless steel |

## CONFIGURATION


*Top view SINGLE THERMORAY*





*Top view DUAL THERMORAY*

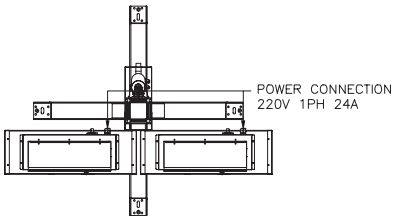


*Front view SINGLE THERMORAY*

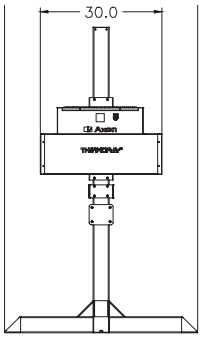


*Front view DUAL THERMORAY*

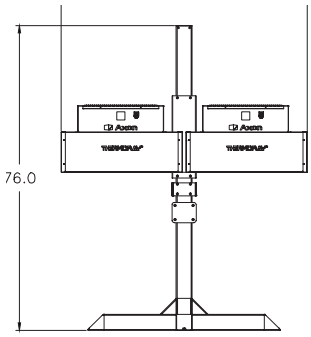


*Dimensions are in inches*

## OPTIONS

- **Dual Tunnel Configuration** - Two tunnels mounted in series accommodate higher s peed applications
- **Automatic Tunnel Lifter** - Automatically raises tunnel during conveyor stoppages to prevent product damage
- **Casters with Leveling Pads** - Enhance flexibility by making it easy to add or remove tunnel from a production line

## SHRINK APPLICATIONS



FULL BODY



FULL BODY OVER THE CAP



TAMPER EVIDENT



PARTIAL

©2026 ProMach Inc. ProMach reserves the right to change or discontinue specifications and designs shown in this brochure without notice or recourse PM-AX-SP111_Axon_ThermoRay_0719v4

PHONE
**919-772-8383**

EMAIL
**Axon@ProMachBuilt.com**

WEB
**AxonCorp.com**

Axon LLC
3080 Business Park Dr, Suite 103
Raleigh, NC 27610